

Camera PTZ IP resolution 1080P (Full HD) built-in IR LED




Model : ZN8-P4NTAF60L

Specification

Model	ZN8-P4NTAF60L
Image sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	1920x1080 @30fps
White Balance	Auto/Manual
Shutter Speed	1/10000 – 1/50s
Day/Night	TRUE Day/Night
IR LED	8 pcs / 100m. (Smart IR)
Min. Illumination	Color 0.02Lux (AGC ON); B/W 0.002Lux, IR LED On with 0Lux
WDR	Digital WDR
Defog	Yes
Lens	4.70 – 103mm (Auto Iris), 22x Optical Zoom
Max. Aperture	F1.6
F.O.V	58.7° ~ 3.2°
Audio In/Out	1ch Audio In, 1ch Audio Out
Network	11 Ethernet (10/100 Base-T) RJ-45 Connector
Image Compression	H.264 High/Main/Baseline Profile, MJPEG

Streaming	Stream 1 : 1920x1080 Stream 2 : D1 to VGA
Protocol	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PoE, Unicast and Multicast supported.
Web Browser	Yes
Security	User security authentication, Reset, Hardware WatchDog
SDK	Yes
VMD	Yes
Alarm Trigger	Message display, I/O output, Email Snapshot, PTZ preset/tour/track
Alarm Event	Message display, I/O output, Email snapshot
Power Consumption	24VAC : 2.5A/MAX 40W
microSD Card	Max 64GB
External I/O Terminals	7ch Alarm In, 2ch Alarm Out
Operating Temperature	-40°C ~ +60°C / 0% - 90% RH
Weight	4.3KG
Dimensions	Ø205x332mm
IP Class	IP66
Certifications	FCC / CE

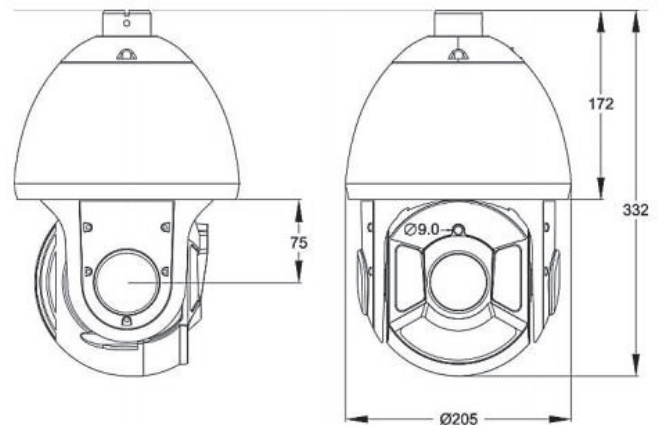

CBC Tokio HQ	CBC New York	CBC Shanghai	CBC Shangshu	CBC Poland
CBC Osaka	CBC Los Angeles	CBC HongKong	CBC Indonesia	CBC Italy
CBC Nagoya	CBC Alabama	CBC Singapore	CBC Thailand	CBC Spain
CBC Fukuoka	CBC Beijing	CBC Taiwan	CBC UK	CBC Russia
CBC Mishima	CBC DongGuan	CBC Bangladesh	CBC Germany	CBC India

CBC (Thailand) Co., Ltd
 23rd FL., ITF Tower 2, 140/53-55 Silom Road,
 Suriyawongse, Bangrak, Bangkok 10500
 Tel: (662)231-6181-2, 231-6506-9